

OVIA




Low Energy Lighting



230V Miniature Downlighter

code	no. of lamps	lampholder type	max wattage
CF005*	1	GU10	13W

code	features	dims (mm)	cutout (mm)	volts	watts
CG015	In-Line Maintained Em/Pack	45x38x860	60	230	15

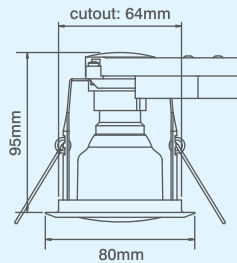

Available Finishes (+)



Product Approvals

Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.




Please add required finish on to the code e.g. **CF005SC**.

LOW ENERGY LIGHTING - Flush Mounted Miniature Downlighter



GF590 Bezel

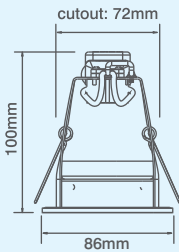

230V IP65 Miniature Downlighter

code	no. of lamps	lampholder type	max wattage
CF096	1	GU10	13W

Cast Shower Light Lens For Use With CF095

- GF495* cast lens for IP65 down light
- GF590* cast IP65 profile bezel

see cast IP65 profiled bezel on page a126

code	features	dims (mm)	cutout (mm)	volts	watts
CG015	In-Line Maintained Em/Pack	45x38x860	60	230	15

Product Approvals
Complies with BS EN 60598.
Suitable for direct mounting on flammable surfaces.



Available Bezel Finishes (+)




Please add required finish on to the code e.g. **GF495BR.**



230V Fixed Compact Downlighter - protruding lamp

code	no. of lamps	lampholder type	max wattage
LE015*	1	GX53	13W

code	description	dimensions	cutout (mm)	supply (mm)	max wattage
CG015	In-Line Maintained Em/Pack	45 x 38 x 860	60	230	15

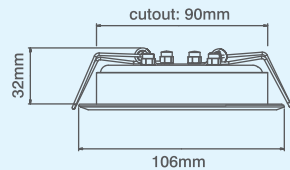

Available Finishes (+)




Product Approvals

Complies with BS EN 60598.
Suitable for direct mounting on flammable surfaces.



Please add required finish on to the code e.g. **LE015SC**.

LOW ENERGY LIGHTING - Flush Mounted Compact Downlighter

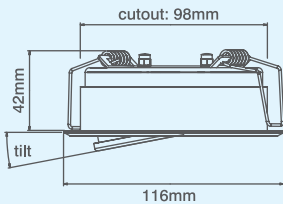

230V Adjustable Compact Downlighter - protruding lamp

code	no. of lamps	lampholder type	max wattage	rotation	tilt
LE020*	1	GX53	13W	n/a	10°

code	description	dimensions	cutout (mm)	supply (mm)	max wattage
CG015	In-Line Maintained Em/Pack	45 x 38 x 860	60	230	15

Product Approvals
Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.



Available Finishes (+)



White



Chrome



Satin Chrome


Please add required finish on to the code e.g. **LE020WH**



230V Fixed Compact Downlighter - Flush Lamp

code	no. of lamps	lampholder type	max wattage
LE035*	1	GX53	13W

code	description	dimensions	cutout (mm)	supply (mm)	max wattage
C.G015	In-Line Maintained Em/Pack	45 x 38 x 860	60	230	15

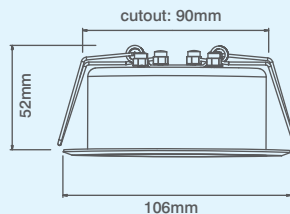

Available Finishes (+)

WH
White

CH
Chrome

SC
Satin Chrome


Product Approvals

Complies with BS EN 60598.
Suitable for direct mounting on flammable surfaces.



Please add required finish on to the code e.g. **LE035SC**.

LOW ENERGY LIGHTING - Flush Mounted Compact Downlighter

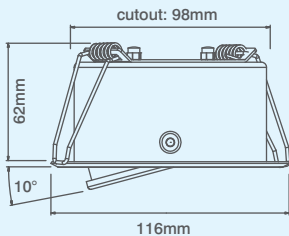

230V Adjustable Compact Downlighter - Flush Lamp

code	no. of lamps	lampholder type	max wattage	rotation	tilt
LE040*	1	GX53	13W	n/a	10°

code	description	dimensions	cutout (mm)	supply (mm)	max wattage
CG015	In-Line Maintained Em/Pack	45 x 38 x 860	60	230	15

Product Approvals
Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.



Available Finishes (+)



White



Chrome



Satin Chrome

Please add required finish on to the code e.g. **LE040CH**




230V CFL Vertical Open Downlighter

code	no. of lamps	lampholder type	max wattage
CF145WH	1	G24q / GX24q (4 Pin)	10W TO 42W

Available Finishes

WH

White

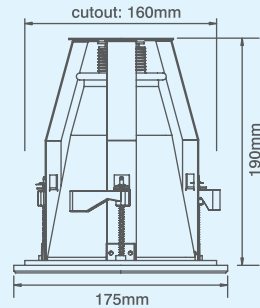


Product Approvals

Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.



LOW ENERGY LIGHTING - Flush Mounted

Control Gear & Emergency Packs

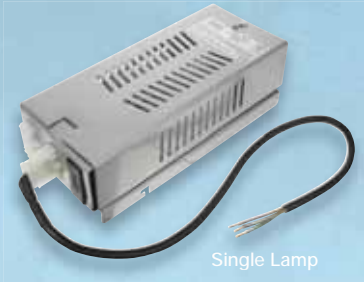

Single Lamp



Emergency Pack



Compact fluorescent modular downlighters offer a number of options and setups. Each downlighter needs modular control gear, with a dimmable option available.

Emergency packs are also available to run a single lamp for up to 3 hours.

See page a34 for full details.

Product Approvals
Complies with BS EN 60598.
Suitable for direct mounting on flammable surfaces.



230V Control Gear and Emergency Packs

code	description	length (mm)	width (mm)	depth (mm)
Standard HF Gear (Non-dimmable)				
CG113	1 X 10W/13W	210	90	60
CG118	1 X 18W	210	90	60
CG142	1 X 26W/32W/42W	210	90	60
Dimmable HF Gear				
CG148	1 X 18W	210	90	60
CG150	1 X 26W/32W/42W	210	90	60
Emergency Pack				
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60
Extension Cable				
CG610	Extension cable for Modular CF range	1m	n/a	n/a



230V CFL Vertical Open Downlighter With Optional Glass


code	no. of lamps	lampholder type	max wattage
CF142WH	1	G24q / GX24q (4 Pin)	10W TO 42W

code	description
GF140CG	IP65 Glass and Seal To Fit CF142
GF145CG	Drop Full Glass Kit To Fit CF142 (C/W Collars)
GF147CG	Drop Halo Glass Kit To Fit CF142 (C/W Collars)

Available Finishes

WH

White

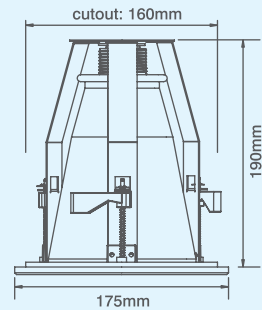


Product Approvals

Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.



LOW ENERGY LIGHTING - Flush Mounted

Control Gear & Emergency Packs

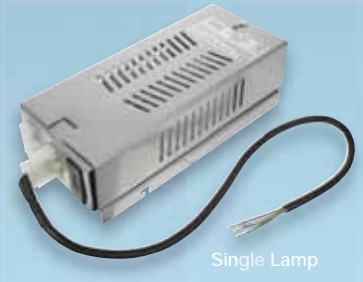

Compact fluorescent modular downlighters offer a number of options and setups. Each downlighter needs modular control gear, with a dimmable option available.

Emergency packs are also available to run a single lamp for up to 3 hours.

See page a34 for full details.

Product Approvals
Complies with BS EN 60598.
Suitable for direct mounting on flammable surfaces.




230V Control Gear and Emergency Packs

code	description	length (mm)	width (mm)	depth (mm)
Standard HF Gear (Non-dimmable)				
CG113	1 X 10W/13W	210	90	60
CG118	1 X 18W	210	90	60
CG142	1 X 26W/32W/42W	210	90	60
Dimmable HF Gear				
CG148	1 X 18W	210	90	60
CG150	1 X 26W/32W/42W	210	90	60
Emergency Pack				
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60
Extension Cable				
CG610	Extension cable for Modular CF range	1m	n/a	n/a



230V CFL Horizontal Open Downlighter

code	no. of lamps	lampholder type	max wattage
CF245WH	2	G24q / GX24q (4 Pin)	10W TO 42W

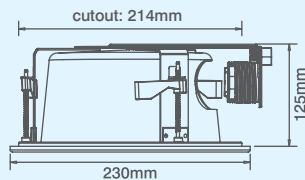

Available Finishes

WH
 White


Product Approvals

Complies with BS EN 60598.
 Suitable for direct mounting
 on flammable surfaces.



LOW ENERGY LIGHTING - Flush Mounted

Control Gear & Emergency Packs

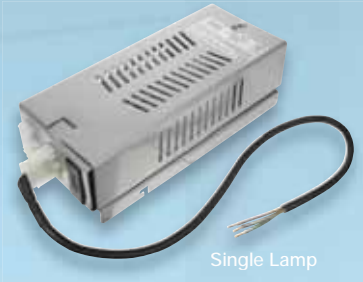

Single Lamp



Emergency Pack



Compact fluorescent modular downlighters offer a number of options and setups. Each downlighter needs modular control gear, with a dimmable option available.

Emergency packs are also available to run a single lamp for up to 3 hours.

See page a34 for full details.

Product Approvals

Complies with BS EN 60598.
Suitable for direct mounting on flammable surfaces.



230V Control Gear and Emergency Packs

code	description	length (mm)	width (mm)	depth (mm)
Standard HF Gear (Non-dimmable)				
CG213	2 X 10W/13W	210	90	60
CG218	2 X 18W	210	90	60
CG242	2 X 26W/32W/42W	210	90	60
Dimmable HF Gear				
CG250	2 X 26W/32W/42W	210	90	60
Emergency Pack				
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60
Extension Cable				
CG610	Extension cable for Modular CF range	1m	n/a	n/a



230V CFL Vertical Open Downlighter With Optional Glass


code	no. of lamps	lampholder type	max wattage
CF242WH	2	G24q / GX24q (4 Pin)	10W TO 42W

code	description
GF240CG	IP65 Glass and Seal To Fit CF242
GF245CG	Drop Full Glass Kit To Fit CF242 (C/W Collars)
GF247CG	Drop Halo Glass Kit To Fit CF242 (C/W Collars)

Available Finishes

WH

White

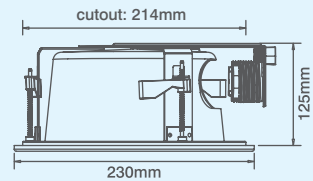

Product Approvals

Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.




LOW ENERGY LIGHTING - Flush Mounted

Control Gear & Emergency Packs



Twin Lamp

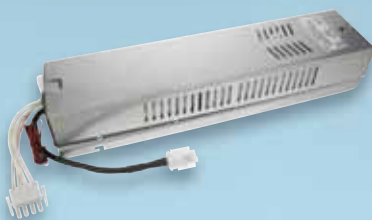

Emergency Pack



Compact fluorescent modular downlighters offer a number of options and setups. Each downlighter needs modular control gear, with a dimmable option available.

Emergency packs are also available to run a single lamp for up to 3 hours.

See page a34 for full details.

Product Approvals

Complies with BS EN 60598.
Suitable for direct mounting on flammable surfaces.



230V Control Gear and Emergency Packs

code	description	length (mm)	width (mm)	depth (mm)
Standard HF Gear (Non-dimmable)				
CG213	2 X 10W/13W	210	90	60
CG218	2 X 18W	210	90	60
CG242	2 X 26W/32W/42W	210	90	60
Dimmable HF Gear				
CG250	2 X 26W/32W/42W	210	90	60
Emergency Pack				
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60
Extension Cable				
CG610	Extension cable for Modular CF range	1m	n/a	n/a



Full Glass



Drop Glass





230V CFL Square Horizontal Downlighter

code	no. of lamps	lampholder type	max wattage
CF442WH	2	G24q / GX24q (4 Pin)	10W TO 42W

230V 2x42W Max. CF Horizontal Drop Glass Downlighter

CF542WH	2	G24q / GX24q (4 Pin)	10W TO 42W
---------	---	----------------------	------------

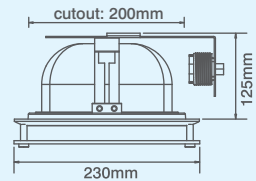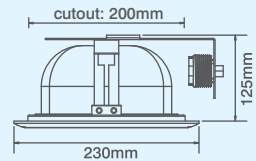

Available Finishes

WH

White

Product Approvals

Complies with BS EN 60598.
 Suitable for direct mounting
 on flammable surfaces.



LOW ENERGY LIGHTING - Flush Mounted Control Gear & Emergency Packs



Twin Lamp



Emergency Pack



Compact fluorescent modular downlighters offer a number of options and setups. Each downlighter needs modular control gear, with a dimmable option available.

Emergency packs are also available to run a single lamp for up to 3 hours.

See page a34 for full details.

Product Approvals
Complies with BS EN 60598.
Suitable for direct mounting on flammable surfaces.



230V Control Gear and Emergency Packs

code	description	length (mm)	width (mm)	depth (mm)
Standard HF Gear (Non-dimmable)				
CG213	2 X 10W/13W	210	90	60
CG218	2 X 18W	210	90	60
CG242	2 X 26W/32W/42W	210	90	60
Dimmable HF Gear				
CG250	2 X 26W/32W/42W	210	90	60
Emergency Pack				
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60
Extension Cable				
CG610	Extension cable for Modular CF range	1m	n/a	n/a



LE120WH



with Glass & Seal



with Full Glass



with Halo Glass



230V CFLi Vertical Open Downlighter With Optional Glass

code	no. of lamps	lampholder type	max wattage
LE120WH	1	E27	20W


Includes CT101C

code	description
GF140CG	IP65 Glass and Seal To Fit LE120WH
GF145CG	Drop Full Glass Kit To Fit LE120WH (C/W Collars)
GF147CG	Drop Halo Glass Kit To Fit LE120WH (C/W Collars)

Available Finishes (+)

WH

White

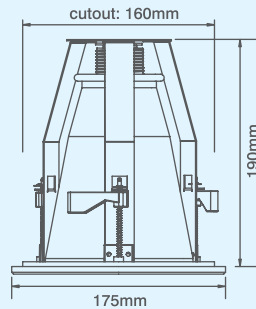

Product Approvals

Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.




LOW ENERGY LIGHTING - Flush Mounted

Compact Fluorescent Downlighter



LE220WH

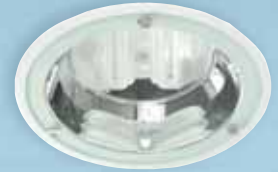


with Glass & Seal



with Full Glass



with Halo Glass

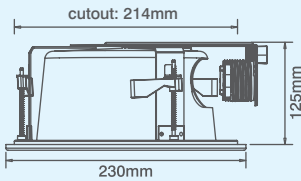

230V CFLi Vertical Open Downlighter With Optional Glass

code	no. of lamps	lampholder type	max wattage
LE220WH	2	E27	2 x 20W

Includes CT101C

code	description
GF240CG	IP65 Glass and Seal To Fit LE220WH
GF245CG	Drop Full Glass Kit To Fit LE220WH (C/W Collars)
GF247CG	Drop Halo Glass Kit To Fit LE220WH (C/W Collars)

Product Approvals
Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.



Available Finishes (+)

WH
White



Single Lamp



Twin Lamp



Emergency Pack



Product Approvals

Complies with BS EN 60598. Suitable for direct mounting on flammable surfaces.




LOW ENERGY LIGHTING - Flush Mounted

Control Gear & Emergency Packs




High Frequency Control Gear (Non-Dimmable)

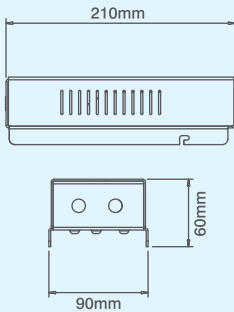

code	description	length (mm)	width (mm)	depth (mm)
CG113	1 X 10W/13W	210	90	60
CG118	1 X 18W	210	90	60
CG142	1 X 26W/32W/42W	210	90	60
CG213	2 X 10W/13W	210	90	60
CG218	2 X 18W	210	90	60
CG242	2 X 26W/32W/42W	210	90	60

High frequency gear as standard to provide energy efficient and trouble free operation. The simple, plug-in facility provided with the high frequency control gear allows fast and easy installation and removal of control gear and fitting in the event of maintenance.


Dimmable High Frequency Control Gear

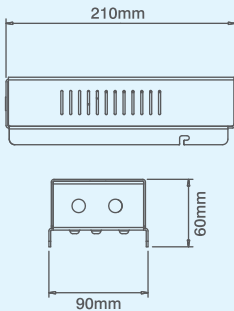

code	description	length (mm)	width (mm)	depth (mm)
CG148	1 X 18W	210	90	60
CG150	1 X 26W/32W/42W	210	90	60
CG250	2 X 26W/32W/42W	210	90	60

Same connection procedure as the standard control gear above with the additional internal connection for installing an analogue 1-10V dimmer switch. 1-10V rotary dimmer switch is available in the CLICK Accessory ranges. The 230V supply should be switched independently.

Emergency Pack



code	description	length (mm)	width (mm)	depth (mm)
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60


The 3 hour non-maintained emergency pack is easily incorporated into a maintained arrangement by the simple inclusion of appropriate control gear. Simple single screw access to terminate incoming cables, with connectors to the control gear and head. The emergency pack illuminates one lamp within a twin lamp head.



230V Angled Aluminium Wall Light

code	no. of lamps	lampholder type	max wattage
LE601AL	1	GX53	9W

IP54

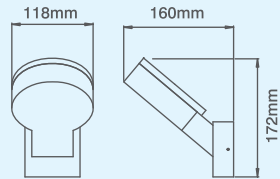

Product Approvals

Good protection against ingress of dust and moisture. Complies with BS EN 60598. Suitable for direct mounting on flammable surfaces.



Available Finishes

LED Lamp Options (†)

CFLI Lamp Options (†)

AL

Aluminium

LEDB

Blue

LEDC

Cool White

9C


Cool White

9W


Warm White

Please add lamp option on to the code e.g. **LE601ALLEDB**.

LOW ENERGY LIGHTING - Surface Mounted Angled Aluminium Wall Light

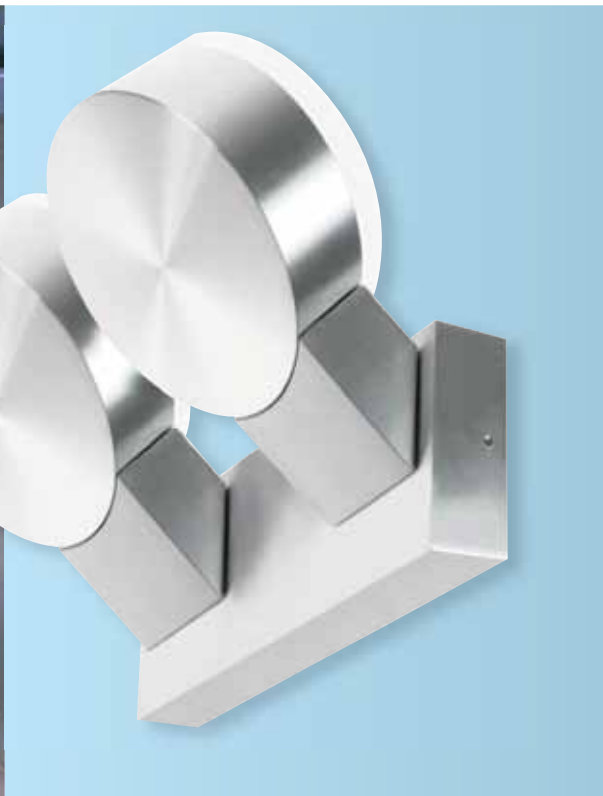

IP54

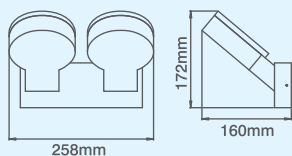

230V Angled Aluminium Wall Light

code	no. of lamps	lampholder type	max wattage
LE602AL	2	GX53	2 x 9W

Product Approvals

Good protection against ingress of dust and moisture. Complies with BS EN 60598. Suitable for direct mounting on flammable surfaces.



Available Finishes

AL

Aluminium

LED Lamp Options (↕)

LEDB

Blue

LEDC

Cool White

CFLi Lamp Options (↕)

9C

Cool White

9W

Warm White

Please add lamp option on to the code e.g. **LE602AL9C**.



230V Low Energy IP44 Wall Light


code	no. of lamps	lampholder type	max wattage
LE611CH11W	1	E14	15W

Supplied with 11W lamp

Available Finishes



Chrome

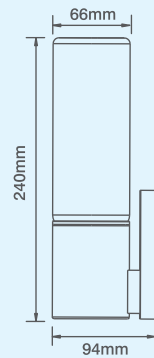


Product Approvals

Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.



LOW ENERGY LIGHTING - Surface Mounted

Wall Lights

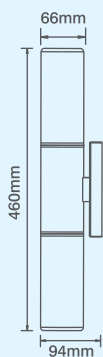

IP44

230V Low Energy IP44 Wall Light

code	no. of lamps	lampholder type	max wattage
LE612CH11W	2	E14	2 x 15W
Supplied with 11W lamp			

Product Approvals
Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.



Available Finishes



Chrome



Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.





LOW ENERGY LIGHTING - Surface Mounted
 Klarheit Wall Light



230V 'Klarheit' Compact Fluorescent Wall Light

code	no. of lamps	lampholder type	max wattage
CF240SV	1	G24q GX24q	26W 32W

Available Finishes

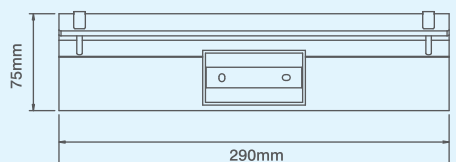



Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.



Klarheit Wall Light





230V 'Klarheit' Low Energy Wall Light

code	no. of lamps	lampholder type	max wattage
LE510SV	1	T5 (549MM)	24W

Available Finishes



Silver

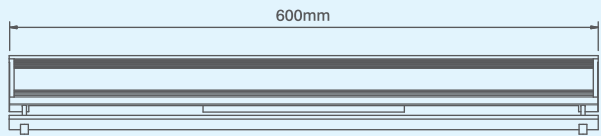



Complies with BS EN 60598.
Suitable for direct mounting
on flammable surfaces.








230V 'Klarheit' Low Energy Adjustable Wall Light

code	no. of lamps	lampholder type	max wattage
LE520SV	2	T5 (549MM)	2 x 24W

Available Finishes

SV
Silver

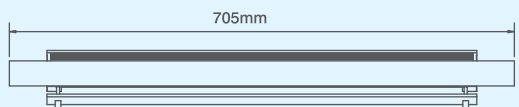



Complies with BS EN 60598
Suitable for direct mounting
on flammable surfaces.



LOW ENERGY LIGHTING - Surface Mounted

Klarheit Suspended Light





230V 'Klarheit' Low Energy Suspended Light

code	no. of lamps	lampholder type	max wattage
LE530SV	2	T5 (849MM)	2 x 39W

Available Finishes



Silver

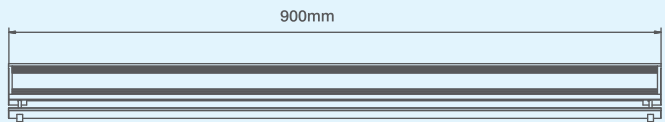

Drop = 150mm to 1500mm

