


MODE



Ergonomic electrical accessories



Switches
Sockets
Connection Units
Fan Isolation Switches
Blank Plates
Cooker Control Panels
Telephone and Data Outlets
Coaxial and Satellite Outlets

MODE

A stylish, contemporary & flexible range of smooth profile wiring accessories

contents

Switches	e5
Sockets	e10
Connection Units	e12
Control Switches	e13
TV, Telephone and Data	e20
New Media	e22
Patress Boxes	e23
Dry Lining Boxes	e24

There are many crucial elements of any interior design – the more obvious ones are décor and furnishings. Less obvious but no less important are electrical accessories; particularly wall accessories which, by their very nature need to be located in prominent line of sight positions.

When selecting wiring accessories designers have often compromised their schemes as they have been unable to identify a suitably flexible solution to satisfy their ideas.

CLICK MODE Accessories can now provide that flexibility with a comprehensive selection of products ranging from the humble light switch and socket outlet through to more specialised products dealing with the very latest developments in telephone and satellite products.

MODE Accessories have been conceived and developed as a high quality, flexible and modern solution to virtually any domestic wiring requirement.



The smooth, modern lines of the MODE accessory plate will fit easily into traditional and contemporary designs alike.

The modular design of MODE allows designers and installers unprecedented flexibility in creating dedicated wiring solutions to deal specifically with actual wiring needs.

In other words, there is now no need to compromise CLICK MODE Accessories provide the complete solution to modern wiring needs.

20 YEAR No Quibble Guarantee

All CLICK MODE accessories are covered by our straight forward 'No Quibble Guarantee' against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.



Switches

10AX Plate Switches (Modular) | 10AX Architrave Switches (Modular) | Dimmer Switches | Control Switches | 45A Switches | 50A Pull Switch

The range of MODE switches described in the following pages has been developed largely as a modular range based on the large selection of switch modules available in the CLICK MINIGRID Module range - see opposite page.

These same modules are fully interchangeable in other CLICK accessory ranges such as metal clad, DECO & DEFINE decorative metal as well as traditional CLICK and POLAR moulded ranges.

Simple, single screw fixing of modules offers the simplest possible means of installing and replacing modules.

Dedicated media transfer plates are dealt with in the later pages of this catalogue (see pages d18-d20) and modules in the NEW MEDIA product brochure.

MINIGRID



The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

For comprehensive information on the full range of modules available please refer to our CLICK MINIGRID product brochure.

Switches

10AX Plate Switches (Modular)

MODE



CMA010 CMA011



CMA012



CMA013



CMA019



CMA105

10AX Plate Switches (Modular)

CMA010	10AX 1 Gang 1 Way Plate Switch
CMA011	10AX 1 Gang 2 Way Plate Switch
CMA012	10AX 2 Gang 2 Way Plate Switch
CMA013	10AX 3 Gang 2 Way Plate Switch
CMA019	10AX 4 Gang 2 Way Plate Switch
CMA105	10AX 6 Gang 2 Way Plate Switch

Switch modules interchangeable with MiniGrid Modules

For the complete range of MiniGrid modules, see the dedicated MiniGrid section, page h1.

Standards: BSEN60669

Back Box Depth: 16mm Minimum Cable Size: 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)



CMA025



CMA026



CMA171



CMA172



CMA027



CMA110

10AX Plate Switches (Modular)

- CMA025 10AX Intermediate Switch
- CMA026 10AX 1 Gang 2 Way Keyswitch
- CMA027 10AX 1 Gang 1 Way Retractive Switch 'Bell'
- CMA110 10AX 1 Gang DP 'Emergency Test' Keyswitch

10AX Architrave Switches (Modular)

- CMA171 10AX 1 Gang 2 Way Architrave Switch
- CMA172 10AX 2 Gang 2 Way Architrave Switch

These plates must be used with the dedicated architrave back boxes WA571 / WA572 and can only be flush mounted. See page e23.

Polar architrave switches can only be surface mounted.

Standards: BSEN60669

Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), **171:** (85mm x 30mm x 9.5mm), **172:** (145mm x 30mm x 9.5mm)

Switches

Modular Switch Plates (Unfurnished)

MODE



CMA401



CMA402



CMA403



CMA404



CMA406



CMA426

Switch Plates (Unfurnished)

CMA401 Single Plate Single Aperture

CMA402 Single Plate Twin Aperture

CMA403 Single Plate Triple Aperture

CMA404 Double Plate 2 X 2 Aperture

CMA406 Double Plate 2 X 3 Aperture

CMA426 Double Plate 6 In-Line Aperture

For the complete range of MiniGrid modules, see the dedicated MiniGrid section, page h1.

Back Box Depth: Dependant on modules used **Cable Size:** Dependant on modules used

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)



CMA140 CMA145



CMA146



CMA147



CMA148

Interchangeable Dimmer Switch Modules

- MD9010 1-10V Analogue Dimmer Module (25X62x22mm)
- MD9001 6A 2 Way Push On/Off (Non-Dimmable) Module (25x62x22mm)
- MD9020 250W/Va 2 Way Resistive/Inductive Dimmer Module (25x62x22mm)
- MD9040 400W/Va 2 Way Resistive/Inductive Dimmer Module (25x62x22mm)
- MD9630 630W/Va 2 Way Resistive/Inductive Dimmer Module (48x56x37mm)
- SP900 Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate. 630W Module only suitable for use with CMA140.



MD9001



MD9630

Dimmer Switches For Tungsten, Halogen & Low Voltage

- CMA140 1 Gang 2 Way 400Va Dimmer
- CMA145 1 Gang 2 Way 250Va Inductive Dimmer
- CMA146 2 Gang 2 Way 250Va Inductive Dimmer
- CMA147 3 Gang 2 Way 250Va Inductive Dimmer
- CMA148 4 Gang 2 Way 250Va Inductive Dimmer

Switch modules interchangeable with MiniGrid Modules.

We recommend the use of branded halogen lamps with all DECO dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced.

Standards: BSEN60669, BSEN55015

Maximum Wattage: 1 Gang 630W, 2 Gang 1200W **Type:** Leading Edge

Back Box Depth: 25mm **Cable Size:** 2 x 1.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)

Power Socket Outlets, Fused Connection Units & Control Switches


13A Wall Socket Outlets | Round Pin
Wall Socket Outlets | Fused Connection Units
Fan Isolation Switches | DP Switches

All MODE 13A Sockets and Fused Connection units are tested and approved to BS1363 offering assured quality and safety.

The provision of large twin earth terminals on sockets and fused connection units as standard, greatly facilitates wiring and installation.

The MODE range offers a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...





CMA030 CMA630




CMA035 CMA635




CMA036



CMA037

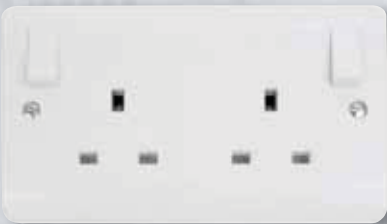

CMA836

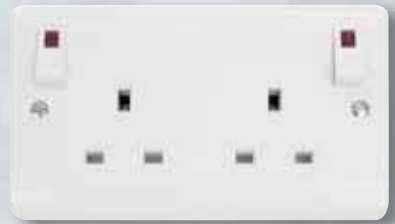

CMA840

13A UK Socket Outlets

- CMA030 13A 1 Gang Socket Outlet
- CMA032 13A 2 Gang Socket Outlet Twin Earth
- CMA035 13A 1 Gang DP Switched Socket Outlet
- CMA036 13A 2 Gang DP Switched Socket Outlet (Twin Earth)
- CMA037 13A 2 Gang DP Switched Socket Outlet (Twin Earth, Clean Earth)
- CMA630 13A 1 Gang Socket Outlet (Twin Earth)
- CMA635 13A 1 Gang DP Switched Socket Outlet (Twin Earth)

13A UK Socket Outlets (Outboard Rockers)

- CMA836 13A 2 Gang Outboard Switched Socket
- CMA840 13A 2 Gang Outboard Switched Socket & Neons

Standards: BS1363,

Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)

Power Socket Outlets

MODE

13A Non-Standard Socket Outlets & Plugs | Round Pin Socket Outlets



CMA034



CMA038



CMA039



CMA935
Non-standard socket



CMA936
Non-standard socket

Round Pin Power Socket Outlets

- CMA034 15A Round Pin Switched Socket Outlet
- CMA038 5A Round Pin Socket Outlet
- CMA039 2A Round Pin Socket Outlet

13A Switched Non-Standard Socket Outlets

- CMA935 13A 1 Gang Switched Non-Standard Socket Outlet
- CMA936 13A 2 Gang Switched Non-Standard Socket Outlet

Standards: BS546, BS1363

Back Box Depth: 25mm Minimum Cable Size: 2A: 2 x 2.5mm² / 3 x 1.5mm² 5A: 2 x 2.5mm² / 3 x 1.5mm² 13A: 4 x 2.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)



CMA649



CMA650



CMA651



CMA652



CMA653



CMA050



CMA051



CMA052



CMA053

Fused Connection Units Without Flex Outlet

- CMA649 3A FCU
- CMA650 13A FCU
- CMA651 13A FCU DP Switched
- CMA652 13A FCU DP Switched & Neon
- CMA653 13A FCU With Neon

Fused Connection Units With Optional Flex Outlet (Through Bottom)

- CMA050 13A FCU
- CMA051 13A FCU DP Switched
- CMA052 13A FCU DP Switched & Neon
- CMA053 13A FCU With Neon

Standards: BS1363 and BS1362 (fuse)

Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)

Control Switches

Fan Isolation Switches | 20A Sink & Bath Switch | 20A Keyfob Switch

MODE



CMA020



CMA021



CMA024



CMA620

20A Keyfob Switch

CMA620 20A DP Keyfob Switch
SP940 Spare Key Fob

20A Sink Bath Switch

CMA024 20A DP Sink Bath Switch With Neon
3 Pole And 20A DP Switches Are Non-Modular

Fan Isolation Switch

CMA020 10A 3 Pole Fan Isolation Switch
CMA021 10A 1 Gang 3 Pole Switch

Standards: BSEN60669

Back Box Depth: 25mm Minimum Cable Size: 20A DP: 4 x 2.5mm² 10A 3P: 1 x 2.5mm² / 2 x 1.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)



CMA022



CMA023



CMA044



CMA046



CMA622



CMA623



CMA040



CMA042

20A Control Switches With Flex Outlet Through Bottom

- CMA022 20A Double Pole Switch
- CMA023 20A Double Pole Switch With Neon
- CMA044 20A Double Pole Switch 'Water Heater'
- CMA046 20A Double Pole Switch With Neon 'Water Heater'

20A Control Switches Without Flex Outlet

- CMA622 20A Double Pole Switch
- CMA623 20A Double Pole Switch With Neon
- CMA040 20A Double Pole Switch 'Water Heater'
- CMA042 20A Double Pole Switch With Neon 'Water Heater'

Standards: BSEN60669

Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm)

Control Switches

45A Switches | Cooker Control Units

MODE




CMA200




CMA201



CMA202

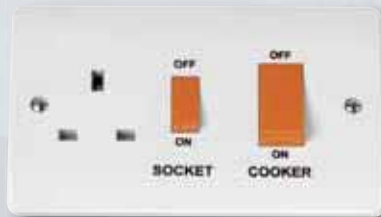

CMA204

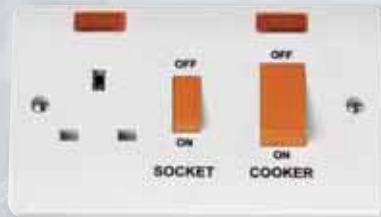

CMA205



CMA203

45A Plate Switches (Red Rockers)

- CMA200 45A 1 Gang Single Cooker Outlet
- CMA201 45A 1 Gang Single Cooker Switch With Neon
- CMA202 45A 2 Gang Single Cooker Switch
- CMA203 45A 2 Gang Single Cooker Switch With Neon
- CMA204 45A Cooker Switch With 13A Switched Socket Outlet
- CMA205 45A Cooker Switch With 13A Switched Socket Outlet And Neons

Standards: BS4177, BSEN60669

Back Box Depth: 35mm Minimum Cable Size: 45A: 1x16mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)



CMA500



CMA501



CMA502



CMA504



CMA505



CMA503

45A Plate Switches (White Rockers)

- CMA500 45A 1 Gang Single Cooker Outlet
- CMA501 45A 1 Gang Single Cooker Switch With Neon
- CMA502 45A 2 Gang Single Cooker Switch
- CMA503 45A 2 Gang Single Cooker Switch With Neon
- CMA504 45A Cooker Switch With 13A Switched Socket Outlet
- CMA505 45A Cooker Switch With 13A Switched Socket Outlet And Neons

Standards: BSEN60669, BS4177

Back Box Depth: 35mm Minimum **Cable Size:** 45A: 1x16mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)

Ceiling Accessories

Pullcord Switches - POLAR White

MODE



PRW208



PRW210/
PRW211



PRC009



PRC210



PRW213



PRC216

Pullcord Switches - POLAR White

- PRC009 10AX 2 Way Pull Switch
- PRC210 10AX 2 Way Pull Switch
- PRC216 16A DP Pull Switch with Neon

Decorative covers available for PRC210/216, see Essentials page k21


Pullcord Switches - POLAR White

- PRW208 10A 3 Pole Pullcord Fan Isolation Switch with Neon
- PRW210 45A DP Pullcord Switch with Mechanical 'ON/OFF' and Neon
- PRW211 50A DP Pullcord Switch with Mechanical 'ON/OFF' and Neon (Twin Terminal Screws)
- PRW213 50A Round DP Pull Switch with Mechanical 'ON/OFF' and Neon (Twin Terminal Screws) C/W Pattress

Standards: BSEN60669

Cable Size: 009, 208, 210: 3x 2.5mm² / 1x 6mm² 211: 2x 6mm² / 1x 25mm² 213: 2x 6mm² / 1x 25mm² 216: 3x 1.5mm² / 2x 2.5mm²

Dimensions: PRC009: 75.5mm Dia. x 43.5mm PRC210/216: 70mm Dia. x 42mm PRW208: 86mm x 86mm x 43mm
PRW210/211: 86mm x 86mm x 43mm PRW213: 100mm Dia. x 77mm

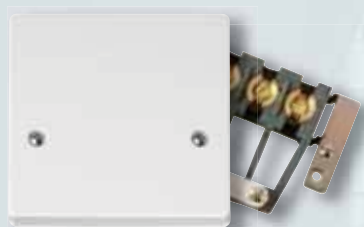

CMA215



PRW217



CMA060



CMA100

Flex Outlet Plate

CMA017 20A Flex Outlet Plate

45A Cooker Connection Plate

CMA215 45A Cooker Connection Plate

PRW217 45A Easyfit Dual Appliance Outlet Plate

UK Design Registration No. 3015175

Patress Box For PRW217 - Urea

PRW218 35mm Deep Patress Box For Use With PRW217

Blank Plates

CMA060 1 Gang Blank Plate

CMA061 2 Gang Blank Plate

Dual Voltage Shaver Socket Outlet

CMA100 115V/230V Dual Voltage Shaver Socket Outlet

CLICK dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 1998 making it safe for use in bathrooms.

Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet

Standards: 100: BSEN61558 215/217: BS5733

Back Box Depth: 017: 16mm min. 100: 47mm min 215: 35mm 217: 25mm

Cable Size: 215: 1 x 16mm² 100: 2 x 1.5mm² / 1 x 2.5mm² 017: 1x6mm² / 4x2.5mm² 217: 10mm²

Dimensions: 215: 84mm x 84mm x 23mm 217: 84mm x 130mm x 27mm

TV, Telephone & Data Sockets

RJ11 Outlet | UK Telephone outlets
Satellite Socket Outlets | Coaxial Sockets

Providing the means to facilitate the connection of modern communications equipment is as important today as it is to provide the electrical power to operate them.

This section of the catalogue is devoted to the NEW MEDIA range of plate accessories which includes products for connecting telephone, computer, television and satellite devices.





CMA115



CMA122 / CMA127



CMA119 / CMA124

RJ11 Data Outlets

CMA115 RJ11 (Irish/US) Outlet

UK Telephone Socket Outlets - Urea

CMA119 Single Telephone Outlet - Master

CMA122 Twin Telephone Outlet - Master

CMA124 Single Telephone Outlet - Secondary

CMA127 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 16mm Minimum **Termination Type:** IDC

Dimensions: 1 Gang (86mm x 86mm x 9.5mm)



CMA065



CMA066



CMA156



CMA170



CMA157



CMA158



CMA159

Non-Isolated Coaxial & Satellite Socket Outlets

- CMA065 Single Non-Isolated Coaxial Socket Outlet
- CMA066 Twin Non-Isolated Coaxial Socket Outlet
- CMA156 Non-Isolated Satellite Outlet Plate
- CMA170 Non-Isolated Satellite And Non-Isolated Coaxial Plate

Isolated Coaxial & Satellite Socket Outlets

- CMA157 Isolated Satellite And Isolated Coaxial Plate
- CMA158 Single Isolated Coaxial Plate
- CMA159 Twin Isolated Coaxial Plate

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth: 16mm Minimum

Dimensions: 1 Gang (86mm x 86mm x 9.5mm)



CMA310



CMA312



CMA311



See our dedicated New Media brochure for more information on the range of New Media Modules available.



MM410BK

MM405WH

MM440BK

MM440BK

New Media Modular Plates

CMA310 Single Plate Single Aperture For Media Modules

CMA311 Single Plate Twin Aperture For Media Modules

CMA312 Twin Plate Quad Aperture For Media Modules

For a complete range of new media modules please see our dedicated New Media catalogue.

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of tv, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

All New Media plates are suitable for use with standard Euro Module inserts.

Back Box Depth: Dependant on module used

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)

Pattress Boxes

MODE

Moulded Pattress Boxes | Converter Pattress Box | Architrave Pattress Boxes



CMA080



CMA081



CMA082



CMA084



CMA089



CMA091



CMA175



CMA176

Moulded Pattress Boxes

- CMA080 1 Gang 16mm Deep Pattress Box With Earth Terminal
- CMA081 1 Gang 25mm Deep Pattress Box
- CMA082 2 Gang 25mm Deep Pattress Box
- CMA083 1 Gang 35mm Deep Pattress Box
- CMA084 2 Gang 35mm Deep Pattress Box
- CMA085 1 Gang 47mm Deep Pattress Box With Earth Terminal
- CMA086 2 Gang 47mm Deep Pattress Box With Cable Restraint And Earth Terminal
- CMA089 Dual accessory 29mm deep Surface Pattress

Converter Pattress Box

- CMA091 1 Gang to 2 gang 16mm Deep Converter Pattress

Architrave Pattress Boxes

- CMA175 1 Gang Architrave Pattress Box With Earth Terminal
 - CMA176 2 Gang Architrave Pattress Box With Earth Terminal
- For Mode Products Only

PVC Pattress Boxes

- CMA230 1 Gang 29mm Deep PVC Pattress Box - Trunking
- CMA235 2 Gang 29mm Deep PVC Pattress Box - Trunking
- CMA240 1 Gang 29mm Deep PVC Pattress Box - Conduit
- CMA245 2 Gang 29mm Deep PVC Pattress Box - Conduit

For the complete range of back boxes see Essentials page k4.



WA106P




WA107P



GA100



WA095

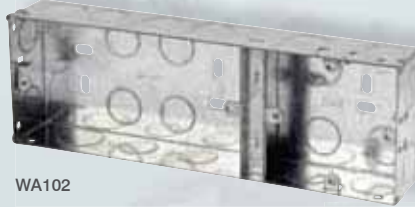

WA102

FlameGuard Cavity Wall Dry Lining Boxes

- WA4135 1 Gang 35mm Deep Dry Lining Box
- WA4235 2 Gang 35mm Deep Dry Lining Box
- WA4147 1 Gang 47mm Dry Lining Box
- WA4247 2 Gang 47mm Dry Lining Box

For the complete range of Flameguard back boxes see Essentials page k6.



WA4247

Cavity Wall Dry Lining Boxes

- WA087P 1 Gang 35mm Deep Dry Lining Box
- WA088P 2 Gang 35mm Deep Dry Lining Box
- WA106P 1 Gang 47mm Deep Dry Lining Box
- WA107P 2 Gang 47mm Deep Dry Lining Box
- WA108P Circular Ceiling Dry Lining Box

'Ezylink' Dry Lining Box Connector

- GA100 'Ezylink' Dry Lining Box Connector

For the complete range of longer fixing screws see Essentials page k4

Galvanised Steel Boxes

- WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
- WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
- WA099 1 + 1 Dual Accessory Box - 35mm Deep
- WA102 1 + 2 Dual Accessory Box - 35mm Deep

For the complete range of back boxes see Essentials page k4.