

curva®



Stylish Electrical Essentials

CLICK
curva®



Switches
Sockets
Fused Connection Units
Control Switches
45A Switch Plates
Flex Outlet & Blank Plates
Telephone and Data Outlets
Coaxial and Satellite Outlets
Cavity Wall Boxes
Pattress Boxes

curva®

The modern domestic wiring solution

contents

Switches	j5	Moulded white accessories are often described as utilitarian, ie. useful or practical without being attractive.
Socket Outlets	j8	
Fused Connection Units	j9	This is certainly not the case with the CURVA range of smooth profile accessories.
Control Switches	j10	
45A Switch Plates	j11	In creating the modern, aesthetically pleasing and ergonomic design of the CURVA range we did not lose sight of the need to produce a true value for money product offering the utmost appeal to installers and end users alike.
Flex Outlet & Blank Plates	j12	
Telephone, TV & Satellite	j14	
Pattress Boxes	j16	Only the best quality raw materials were used in producing this durable, attractive and modern range of accessories which will adorn the walls of all manner of buildings for years to come.
Galv. Steel & Cavity Wall Boxes	j17	



10 YEAR No Quibble Guarantee

All CLICK CURVA accessories are covered by our straight forward 'No Quibble Guarantee' against any fault in materials or manufacture experienced at any time within 10 years of the date of supply.



Switches

10AX Plate Switches | Dimmer Switches

The range of CURVA switches described in the following pages has been developed to offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

Switches

10AX Plate Switches

curva®



CCA010/CCA011/CCA025



CCA012



CCA013



CCA027



CCA019



CCA105

10AX Plate Switches

CCA010	10AX 1 Gang 1 Way Plate Switch
CCA011	10AX 1 Gang 2 Way Plate Switch
CCA012	10AX 2 Gang 2 Way Plate Switch
CCA013	10AX 3 Gang 2 Way Plate Switch
CCA019	10AX 4 Gang 2 Way Plate Switch
CCA105	10AX 6 Gang 2 Way Plate Switch
CCA025	10AX Intermediate Switch
CCA027	10AX 1 Gang 1 Way Retractive Switch 'Bell'

Standards: BSEN60669

Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)



CCA140 / CCA141



CCA142



CCA143



CCA144

Interchangeable Dimmer Switch Modules

- MD9010 1-10V Analogue Dimmer Module (25x62x22mm)
- MD9001 6A 2 Way Push On/Off (Non-Dimmable) Module (25x62x22mm)
- MD9020 250W/Va 2 Way Resistive/Inductive Dimmer Module (25x62x22mm)
- MD9040 400W/Va 2 Way Resistive/Inductive Dimmer Module (25x62x22mm)
- MD9630 630W/Va 2 Way Resistive/Inductive Dimmer Module (48x56x37mm)
- SP900 Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate.

630W Module only suitable for use with CCA140.



MD9001



MD9630

Dimmer Switches For Tungsten, Halogen & Low Voltage

- CCA140 1 Gang 2 Way 400Va Dimmer
- CCA141 1 Gang 2 Way 250Va Dimmer
- CCA142 2 Gang 2 Way 250Va Dimmer
- CCA143 3 Gang 2 Way 250Va Dimmer
- CCA144 4 Gang 2 Way 250Va Dimmer

We recommend the use of branded halogen lamps with CURVA dimmers. The use of non branded inferior lamps may require the nominal rating of the dimmer to be reduced.

Standards: BSEN60669, BSEN55015

Maximum Wattage: 1 Gang Plate 630W, 2 Gang Plate 1200W **Type:** Leading Edge

Back Box Depth: 25mm **Cable Size:** 2 x 1.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)

Power Socket Outlets, Fused Connection Units & Control Switches

13A Wall Socket Outlets | Round Pin
Wall Socket Outlets | Fused Connection Units
Fan Isolation Switches | DP Switches

All CURVA 13A Sockets and Fused Connection units are tested and approved to BS1363 offering assured quality and safety.

The provision of large twin earth terminals on sockets and fused connection units as standard, greatly facilitates wiring and installation.

The CURVA range offers a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...






CCA038



CCA039



CCA605

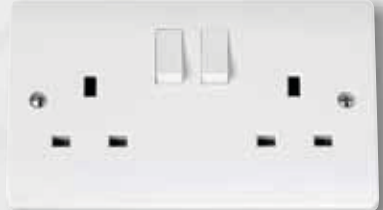

CCA606

13A UK Socket Outlets

CCA605 13A 1 Gang Socket Outlet

CCA606 13A 2 Gang Socket Outlet

Round Pin Power Socket Outlets

CCA038 5A Round Pin Socket Outlet

CCA039 2A Round Pin Socket Outlet

Standards: BS1363, BS546

Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)

13A Fused Connection Units



Fused Connection Units With Optional Flex Outlet



CCA050



CCA051



CCA052



CCA053

Fused Connection Units With Optional Flex Outlet Through Front of Plate

- CCA050 13A Fused Connection Unit
- CCA051 13A Fused Connection Unit DP Switched
- CCA052 13A Fused Connection Unit DP Switched & Neon
- CCA053 13A Fused Connection Unit With Neon

Standards: BS1363 and BS1362 (fuse)

Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm)



CCA020



CCA021



CCA022



CCA023



CCA024



CCA040



CCA042

20A Control Switches Without Flex Outlet

- CCA022 20A Double Pole Switch
- CCA023 20A Double Pole Switch With Neon
- CCA040 20A Double Pole Switch 'Water Heater'
- CCA042 20A Double Pole Switch With Neon 'Water Heater'

20A Sink Bath Switch

- CCA024 20A DP Sink Bath Switch With Neon

Fan Isolation Switch

- CCA020 10A 3 Pole Fan Isolation Switch
- CCA021 10A 1 Gang 3 Pole Switch

Standards: BSEN60669

Back Box Depth: 25mm Minimum **Cable Size:** 20A DP: 4 x 2.5mm² 10A 3P: 1 x 2.5mm² / 2 x 2.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm)

Control Switches

45A Switches | Cooker Control Units

curva®



CCA200




CCA201



CCA202



CCA204

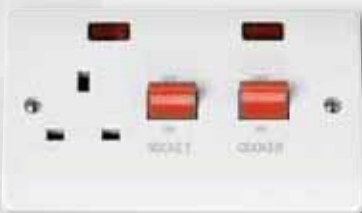

CCA205



CCA203

45A Plate Switches (Red Rockers)

- CCA200 45A 1 Gang Single Cooker Outlet
- CCA201 45A 1 Gang Single Cooker Switch With Neon
- CCA202 45A 2 Gang Single Cooker Switch
- CCA203 45A 2 Gang Single Cooker Switch With Neon
- CCA204 45A Cooker Switch With 13A Switched Socket Outlet
- CCA205 45A Cooker Switch With 13A Switched Socket Outlet And Neons

Standards: BSEN60669, BS4177

Back Box Depth: 35mm Minimum **Cable Size:** 45A: 1 x 16mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)




CCA017



CCA100



CCA060

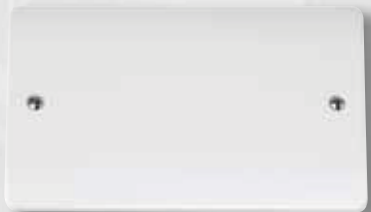

CCA061

Blank Plates

- CCA060 1 Gang Blank Plate
- CCA061 2 Gang Blank Plate

Flex Outlet Plate

- CCA017 20A Flex Outlet Plate

Dual Voltage Shaver Socket Outlet

- CCA100 115V/230V Dual Voltage Shaver Socket Outlet


CLICK dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:1998 making it safe for use in bathrooms.

Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Standards: 100: BSEN61558

Back Box Depth: 017:16mm min. 100: 47mm min. **Cable Size:** 100: 2 x 1.5mm² / 1 x 2.5mm² 017: 1 x 6mm² / 4 x 2.5mm²

Dimensions: 1 Gang (86mm x 86mm x 9.5mm), 2 Gang (146mm x 86mm x 9.5mm)

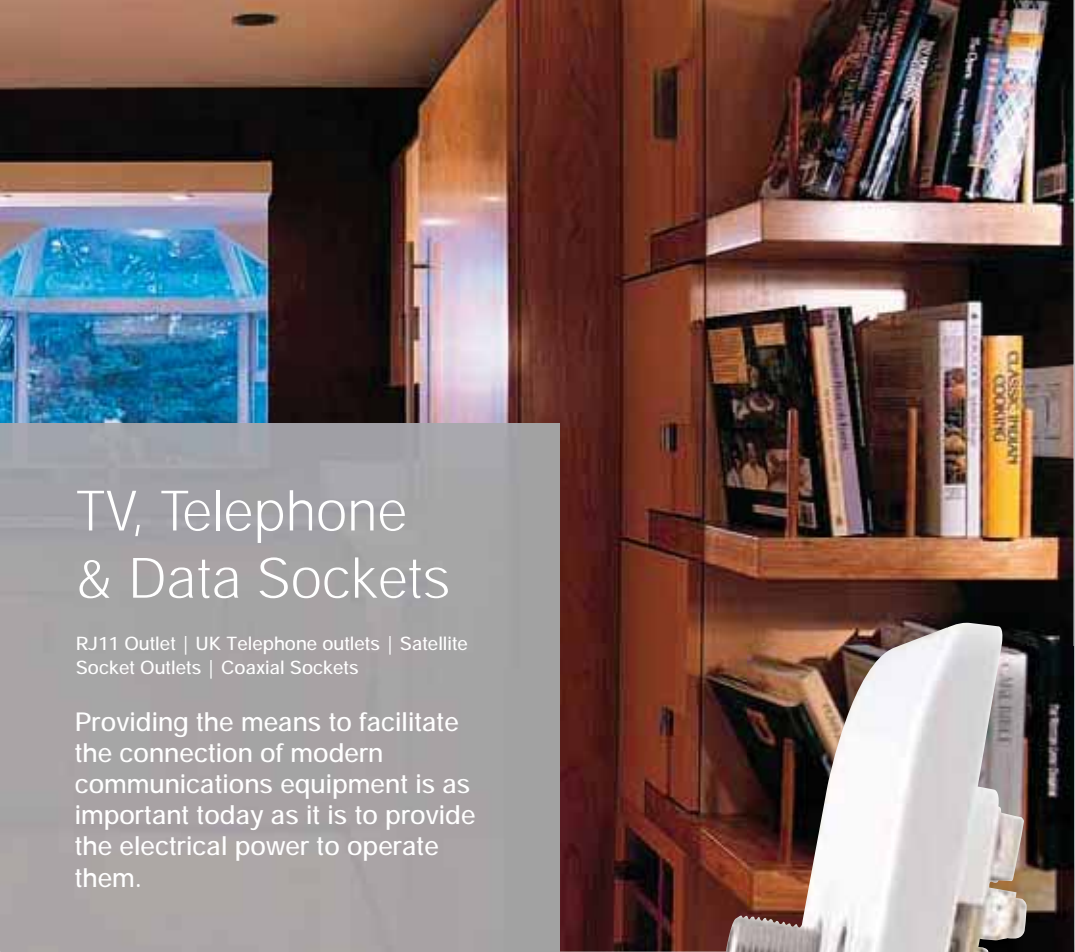

TV, Telephone & Data Sockets

RJ11 Outlet | UK Telephone outlets | Satellite Socket Outlets | Coaxial Sockets

Providing the means to facilitate the connection of modern communications equipment is as important today as it is to provide the electrical power to operate them.



CCA115



CCA122/127



CCA119/124

RJ11 Data Outlets

CCA115 RJ11 (Irish/US) Outlet

UK Telephone Outlets - Urea

CCA119 Single Telephone Outlet - Master
 CCA122 Twin Telephone Outlet - Master
 CCA124 Single Telephone Outlet - Secondary
 CCA127 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 16mm Minimum **Termination Type:** IDC
Dimensions: 1 Gang (86mm x 86mm x 9.5mm)



CCA065



CCA066



CCA156



CCA170



CCA157



CCA158



CCA159

Non-Isolated Coaxial & Satellite Sockets

- CCA065 Single Non-Isolated Coaxial Socket Outlet
- CCA066 Twin Non-Isolated Coaxial Socket Outlet
- CCA156 Non-Isolated Satellite Outlet Plate
- CCA170 Non-Isolated Satellite And Non-Isolated Coaxial Plate

Isolated Coaxial & Satellite Sockets

- CCA157 Isolated Satellite And Isolated Coaxial Plate
- CCA158 Single Isolated Coaxial Plate
- CCA159 Twin Isolated Coaxial Plate

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth: 16mm Minimum

Dimensions: 1 Gang (86mm x 86mm x 9.5mm)



CCA080



CCA081



CCA082



CCA083



CCA084



CCA085



CCA086

Moulded Pattress Boxes

- CCA080 1 Gang 16mm Deep Pattress Box With Earth Terminal
- CCA081 1 Gang 25mm Deep Pattress Box
- CCA082 2 Gang 25mm Deep Pattress Box
- CCA083 1 Gang 35mm Deep Pattress Box
- CCA084 2 Gang 35mm Deep Pattress Box
- CCA085 1 Gang 47mm Deep Pattress Box With Earth Terminal
- CCA086 2 Gang 47mm Deep Pattress Box With Cable Restraint And Earth Terminal

Dry Lining Boxes

Cavity Wall Dry Lining Boxes | 'Ezylink' Dry Lining Box Connector | Galvanised Steel Boxes

curva®



WA106P




WA107P



GA100



WA095

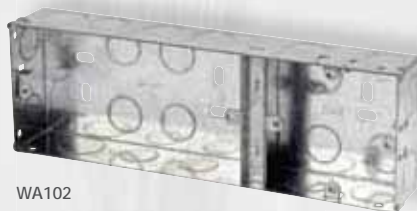

WA102

FlameGuard Cavity Wall Dry Lining Boxes

- WA4135 1 Gang 35mm Deep Dry Lining Box
- WA4235 2 Gang 35mm Deep Dry Lining Box
- WA4147 1 Gang 47mm Dry Lining Box
- WA4247 2 Gang 47mm Dry Lining Box

For the complete range of Flameguard back boxes see Essentials page k6.



WA4247

Cavity Wall Dry Lining Boxes

- WA087P 1 Gang 35mm Deep Dry Lining Box
- WA088P 2 Gang 35mm Deep Dry Lining Box
- WA106P 1 Gang 47mm Deep Dry Lining Box
- WA107P 2 Gang 47mm Deep Dry Lining Box
- WA108P Circular Ceiling Dry Lining Box

'Ezylink' Dry Lining Box Connector

- GA100 'Ezylink' Dry Lining Box Connector

For the complete range of longer fixing screws see Essentials page k4

Galvanised Steel Boxes

- WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
- WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
- WA099 1 + 1 Dual Accessory Box - 35mm Deep
- WA102 1 + 2 Dual Accessory Box - 35mm Deep

For the complete range of back boxes see Essentials page k4.

A series of 25 horizontal grey bars stacked vertically, intended for writing notes. The bars are uniform in length and height, providing a structured space for text.